



## ProStep® Recess



ProStep® Recess offers fantastic durability, safety and a great range of insert options. It provides a stunning recessed finish, without compromising on safety. ProStep® Recess is ideal when a recess has been allowed in the manufacture of stair treads.

ProStep® Recess is manufactured from heavy duty tempered aluminium extrusions and provides a clean, low profile safety stair edging option.

Utilising the ProStep® Safety Insert system, which offers durable P4 and P5 anti-slip options, this unique product offers all the benefits of the ProStep® range in a brilliantly designed recessed edging. Often used in marble or natural stone stair treads, materials which demand the highest level of workmanship.

Fixed by adhesive or concealed screws, ProStep® Recess is NCC compliant and compatible with the ProStep® Photo-luminescent insert making it a great option for Egress applications.

### KEY FEATURES

- Ideal choice for seamless design, where safety is incorporated within the stair tread.
- 5 Year CTA manufacturers warranty
- Concealed fixing points mean the product cannot be tampered with, making it ideal for public applications
- Available in a choice of 6 rubber (P4) or 3 Carborundum strip insert (P5) colours
- Conforms to all aspects of the relevant Australian standards

## PROSTEP® RECESS FEATURES

50mm insert depth conforms with the requirements of AS1428

Strong 5mm deep recess holds insert without warping


Industry leading 5 Year Manufacturers Warranty

PLEASE CONTACT CTA ON  
**1300 282 282**  
TO REQUEST A SAMPLE


Utilises the ProStep® range of safety inserts - all options meet the requirements of AS4586 - P5 and P4 options available

Aluminium extrusion with a hard anodised, UV stable finish in black or natural

Fixed via concealed screws or adhesive



PROSTEP® RECESS

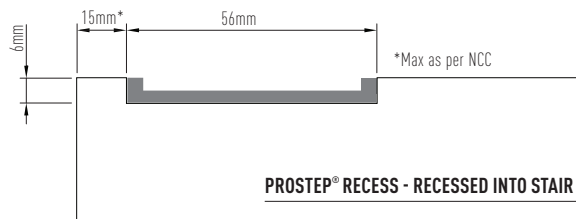

PROSTEP® RECESS - RECESSED INTO STAIR

## INSTALLATION

A recess of 5mm deep x 56mm wide is required, glued direct onto hard surfaces or screwed via concealed fixing points. Suitable for both internal and external environments.

## DIMENSIONS

54mm wide and 5mm thick - 3.6m or supplied to length.

## PRODUCT OPTIONS

SLIP RATING	INSERT	PRODUCT CODE
P5	Carborundum	UM013-SNCI-XXX
P5	Egress	UM013-SNCI-PL-XXX
P4	Rubber - Fine Line	UM013-SNPI-RIP-XXX
P4	Rubber - Ridge	UM013-SNPI-ART-XXX

Where XXX = Insert colour (see below). Also available as a Black extrusion (UM013-160)

## MATERIAL

Manufactured from a 5mm hard tempered anodized aluminium extrusion.

## APPLICATIONS

Similar to the HiLight® ThreeBar, ProStep® Recess is ideal in areas requiring excellent wear resistance and high end aesthetics such as, restaurants hotel lobbies, and areas subject to high foot traffic.

Ideally ProStep® Recess is included in the manufacture of the stair treads, however can be applied as a retro-fit option. This is provided routing of the stair tread is practical.

## COMPLIANCE

All CTA products conform with the requirements of the Australian standards and are tested by NATA certified labs.

Please consult with CTA for relevant test reports:

- AS1428:2009 Design for access and mobility
- AS4586:2013 Slip resistance classifications for new pedestrian surface materials
- NCC - National Construction Codes

## LUMINANCE CONTRAST

Please view the CTA Luminance Brochure for details or contact your CTA representative to discuss or request an onsite luminosity test.

## WARRANTY

CTA provides a comprehensive warranty, in accordance with our published warranty statement which can be viewed on [cobbletac.com](http://cobbletac.com).

## CTA COMPLETE CARE MAINTENANCE

Asset owners have a Duty of Care responsibility to maintain access product within design performance parameters. CTA offers a fully integrated maintenance program which includes regular scheduled maintenance and replacement of worn components where necessary. Please contact your CTA representative for information on our "Complete Care Program."

## CTA INSTALLERS

CTA's accredited installers are available to do the installation work for you - with short turnaround times and guaranteed workmanship. Our installation team is the largest and most experienced in the nation, so you can rest assured you are in safe hands.

## MORE INFORMATION

Product Installation, list of Approved Products and Material Safety Data Sheets are available on request.

## PROSTEP® SAFETY INSERT SYSTEM

The ProStep® family of safety stair edging utilises a common insert system. Once a suitable profile has been selected, the insert that best fits the application is chosen, with variations in colour, anti-slip rating, durability and style. Please see the ProStep® Safety Insert System Data sheet for images and more information. **Call 1300 282 282 to request a sample.**

	Carb	Egress	Ridge	FineLine
AS4586 Rating	P5	P5	P4	P4
Material	Carborundum	Carborundum & Photo-Luminescent	Rubber	Rubber
Colours	Yellow / Grey / Black	Yellow / Grey / Black	Yellow / Grey / Black Ivory / Terracotta / Pacific Blue	Yellow / Grey / Black Ivory / Terracotta / Pacific Blue
Warranty / Life Expectancy	5 Years / 10+ years	5 Years / 10+ years	5 Years / 10+ years	5 Years / 10+ years

**YELLOW<sup>112</sup>**

**IVORY<sup>108</sup>**

**GREY<sup>155</sup>**

**TERRACOTTA<sup>124</sup>**

**BLACK<sup>160</sup>**

**PACIFIC BLUE<sup>135</sup>**

**CALL CTA ON 1300 282 282**  
TO ARRANGE A MEETING WITH A SALES CONSULTANT

VICTORIA 1300 282 282 NEW SOUTH WALES 1300 282 679 QUEENSLAND 1300 282 753 WA 1300 282 282



[WWW.CTAGROUP.COM.AU](http://WWW.CTAGROUP.COM.AU)

# ProStep® Safety Insert System

The ProStep® family of safety stairs nosing utilises a common insert system. Once a suitable profile has been selected, the insert that best fits the application is chosen, with variations in colour, anti-slip rating, durability and style.

## Carb

P5 rated, tough and durable, the ProStep® Carb insert is manufactured from Carborundum ensuring it is the perfect choice for a attractive non-slip stair nosing.



Perfect for:  
Internal and External,  
high traffic situations.



YELLOW<sup>112</sup>



GREY<sup>155</sup>



BLACK<sup>160</sup>

## Egress

All the features of ProStep® Carb, but also the added benefit of a Photo-luminescent leading edge greatly increasing safety of in low light conditions. Will continue to glow for up to 8 hours.



Perfect for:  
Egress ways in schools,  
hotels, restaurants and  
sporting facilities where  
low light conditions may  
compromise visibility.



YELLOW<sup>112</sup>



GREY<sup>155</sup>




BLACK<sup>160</sup>

## Ridge


ProStep® Ridge is a rubber insert manufactured as an attractive rib surface. Easy to clean, it has a P4 anti-slip rating and is suitable for all internal applications.




Perfect for:  
Light traffic  
internal use.

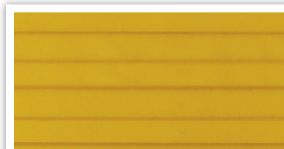


YELLOW<sup>112</sup>

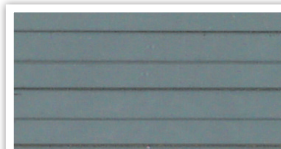


GREY<sup>155</sup>

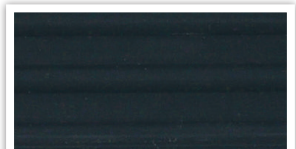


BLACK<sup>160</sup>

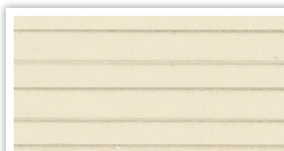

IVORY<sup>108</sup>

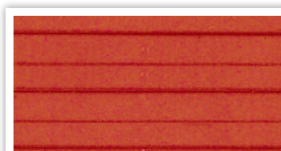

TERRACOTTA<sup>124</sup>

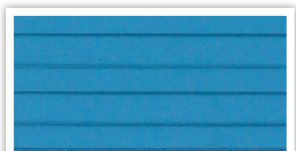


OCEAN BLUE<sup>135</sup>

## FineLine


ProStep® FineLine is similar to the Rib insert, but with a finer surface. Easy to clean, it has a P4 anti-slip rating and is suitable for all internal applications.




Perfect for:  
Light traffic  
internal use.

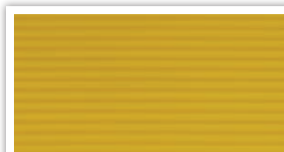


YELLOW<sup>112</sup>

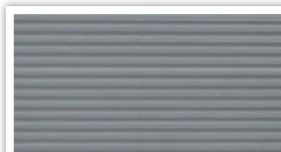


GREY<sup>155</sup>

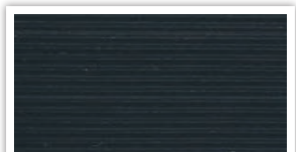


BLACK<sup>160</sup>

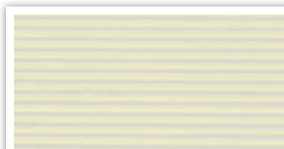

IVORY<sup>108</sup>

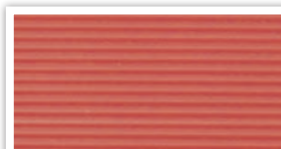

TERRACOTTA<sup>124</sup>

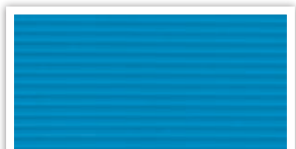

OCEAN BLUE<sup>135</sup>