



HiLight® ThreeBar

**FIVE
YEAR**
MANUFACTURERS
WARRANTY

P5
SLIP RESISTANCE FOR
MAXIMUM SAFETY

NCC
COMPLIANT

**HEAVY DUTY
TEMPERED
ALUMINIUM
EXTRUSIONS**

**VANDAL
PROOF
INSTALL
SYSTEM**

ISO
GUARANTEE

HiLight® ThreeBar is an ideal low profile option when stair manufacture allows for recessing of the stair treads. The sleek design and excellent safety rating of the HiLight® ThreeBar provides seamless integration with its environment.

When the aesthetic demands clean lines and crisp design - HiLight® ThreeBar is the perfect solution.

Available with P5 rated grey, black or safety yellow carborundum inserts, the HiLight® ThreeBar provides maximum safety in a minimal design.

Recessed into the stair tread, and fixed by adhesive or concealed screws, HiLight® ThreeBar is NCC compliant and meets AS1428 luminance requirements.

Manufactured from 5mm hard tempered anodized aluminium, it's perfect for areas with high foot traffic without compromising on aesthetics.

KEY FEATURES

- Conforms to all aspects of the relevant safety and public access standards.
- Available in 3 insert colours: black, safety yellow and grey.
- Ideal choice for seamless design, where safety is incorporated within the stair tread.
- 5 Year CTA manufacturers warranty.
- P5 safety rating, the highest in the industry.

HILIGHT® THREEBAR FEATURES

50mm depth conforms with the requirements of AS1428

Aluminium extrusion with a hard anodised, UV stable finish in black or natural


Industry leading 5 Year Manufacturers Warranty

PLEASE CONTACT CTA ON
1300 282 282
TO REQUEST A SAMPLE


Three P5 rated, 10mm wide inserts in any combination of yellow, black or grey meets the requirements of AS4586

Strong 5mm deep recess holds insert without warping

Secured via concealed screws or adhesive



HILIGHT® THREEBAR

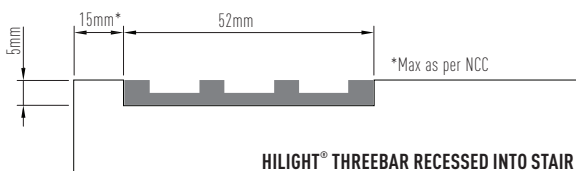

HILIGHT® THREEBAR RECESSED INTO STAIR

INSTALLATION

A recess of 5mm deep x 52mm wide is required, glued direct onto hard surfaces or screwed via concealed fixing points. Suitable for both internal and external environments.

PRODUCT OPTIONS

| MODEL | SLIP RATING | INSERT | PRODUCT CODE |
|----------|-------------|-------------|-------------------|
| Recessed | P5 | Carborundum | UM070-SNCI-XXX |
| Recessed | P5 | Egress | UM070-SNCI-PL-XXX |

Where XXX = insert colour (see below). Also available as a Black extrusion (UM070160)

HILIGHT® SAFETY INSERT SYSTEM

The HiLight® family of safety stair edging utilises a common insert system. Comprised of a 10mm wide Carborundum P5 rated insert in three colours, these inserts offer the specifier the ability to mix colours to create the desired effect. A photo-luminescent option is also available. Please contact CTA for product images and to request a sample in the colours of your choice.

| | Carb | Egress |
|----------------------------|-----------------------|---------------------------------|
| AS4586:2013 Rating | P5 | P5 |
| Material | Carborundum | Carborundum & Photo-Luminescent |
| Colours | Yellow / Grey / Black | Yellow / Grey / Black |
| Warranty / Life Expectancy | 5 Years / 10+ years | 5 Years / 10+ years |

YELLOW¹¹²

GREY¹⁵⁵

BLACK¹⁶⁰

COMPLIANCE

All CTA products conform with the requirements of the Australian standards and are tested by NATA certified labs.

Please consult with CTA for relevant test reports:

- AS1428:2009 Design for access and mobility
- AS4586:2013 Slip resistance classifications for new pedestrian surface materials
- NCC - National Construction Codes

LUMINANCE CONTRAST

Please view the CTA Luminance Brochure for details or contact your CTA representative to discuss or request an onsite luminosity test.

WARRANTY

CTA provides a comprehensive warranty, in accordance with our published warranty statement which can be viewed on cobbletac.com.

CTA COMPLETE CARE MAINTENANCE

Asset owners have a Duty of Care responsibility to maintain access product within design performance parameters. CTA offers a fully integrated maintenance program which includes regular scheduled maintenance and replacement of worn components where necessary. Please contact your CTA representative for information on our "Complete Care Program."

CTA INSTALLERS

CTA's accredited installers are available to do the installation work for you – with short turnaround times and guaranteed workmanship. Our installation team is the largest and most experienced in the nation, so you can rest assured you are in safe hands.

MORE INFORMATION

Product Installation, list of Approved Products and Material Safety Data Sheets are available on request.

MATERIAL

Manufactured from a 5mm hard tempered anodized aluminium extrusion carrying 3 carborundum strip inserts for heavy traffic applications.

APPLICATIONS

HiLight® ThreeBar is ideal in areas requiring excellent wear resistance and high end aesthetics such as, restaurants hotel lobbies, and areas subject to high foot traffic.

Ideally HiLight® ThreeBar is included in the manufacture of the stair treads, however can be applied as a retro-fit option. This is provided routing of the stair tread is practical.

DIMENSIONS

50mm wide and 5mm thick - 3.6m or supplied to length.

CALL CTA ON 1300 282 282
TO ARRANGE A MEETING WITH A SALES CONSULTANT

VICTORIA 1300 282 282 NEW SOUTH WALES 1300 282 679 QUEENSLAND 1300 282 753 WA 1300 282 282



WWW.CTAGROUP.COM.AU