

SafeLine® Twin

**TWELVE
MONTH**
MANUFACTURERS
WARRANTY

**RATED
P5**
SLIP RESISTANCE FOR
MAXIMUM SAFETY

**NCC
COMPLIANT**

**HEAVY DUTY
TEMPERED
ALUMINIUM
EXTRUSIONS**

**VANDAL
PROOF
INSTALL
SYSTEM**

NEW
TWIN INSERT
RANGE

CTA SafeLine® Twin is a budget alternative to the ProStep® range. Even though this is a lower cost product, SafeLine® Twin still features the characteristics of high safety, ease of installation and durability of ProStep® Classic.

SafeLine® Twin includes the SafeLine® range of strip insert safety tapes, which are manufactured from a unique combination of aluminium oxide and a thick plastic carrier to provide a flexible yet durable anti-slip solution.

The inserts are formulated to resist water, steam and detergent and will withstand continuous temperatures in the range -30°C to 120°C.

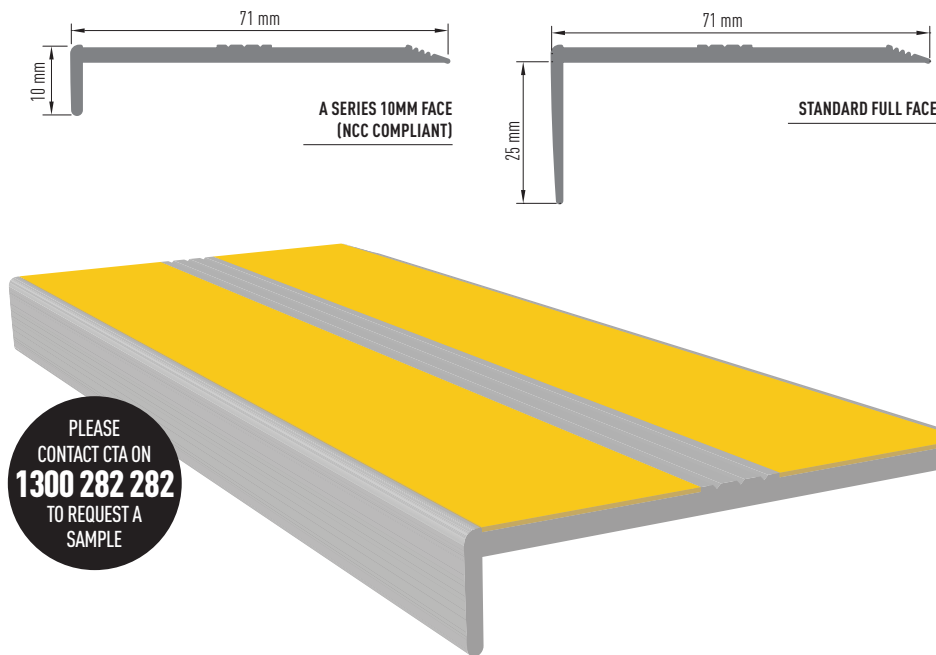
SafeLine® Twin stair nosing comes with the SafeLine® insert pre-assembled, which are pre-cut to length and pre-drilled, and supplied with fixing screws and star plugs.

KEY FEATURES

- Easy to install with no fuss - ideal for DIY applications
- Provide an P5 safety rating, the highest in the industry
- SafeLine® inserts are also available as spares and are easily replaced in the event of damage
- Conforms to all aspects of the relevant safety and public access standards
- Available in A Series to meet the NCC requirements.

SAFELINE® TWIN PROFILE

Available in 10mm face *A Series* (NCC compliant) and 25mm full face *Standard*.

**PRODUCT OPTIONS**

MODEL	SLIP RATING	INSERT	PRODUCT CODE
A Series (10mm)	P5	SafeLine	UM010A-XXX
Standard (25mm)	P5	SafeLine	UM010-XXX

Where XXX = tape colour (see right). Also available as a Black extrusion (UM010A160)

MATERIAL

Manufactured from heavy duty tempered aluminium extrusions and SafeLine® inserts – a unique combination of aluminium oxide and a thick plastic carrier.

APPLICATIONS

SafeLine® Twin stair nosing is particularly suitable for light duty pedestrian traffic in internal and external flooring surfaces prone to water or oil spillage.

DIMENSIONS

10mm face edge and 72mm wide. Twin 25mm wide SafeLine safety tread inserts. Supplied to length up to 3.6m.

INSTALLATION

Supplied to length, pre-drilled with screws and ready for installation.

COLOURS**COMPLIANCE**

All CTA products conform with the requirements of the Australian standards and are tested by NATA certified labs.

Please consult with CTA for relevant test reports:

- AS1428:2009 Design for access and mobility
- AS4586:2013 Slip resistance classifications for new pedestrian surface materials
- NCC - National Construction Codes

LUMINANCE CONTRAST

Please view the CTA Luminance Brochure for details or contact your CTA representative to discuss or request an onsite luminosity test.

WARRANTY

CTA provides a comprehensive warranty, in accordance with our published warranty statement which can be viewed on cobbletac.com.

CTA COMPLETE CARE MAINTENANCE

Asset owners have a Duty of Care responsibility to maintain access product within design performance parameters. CTA offers a fully integrated maintenance program which includes regular scheduled maintenance and replacement of worn components where necessary. Please contact your CTA representative for information on our "Complete Care Program."

CTA INSTALLERS

CTA's accredited installers are available to do the installation work for you – with short turnaround times and guaranteed workmanship. Our installation team is the largest and most experienced in the nation, so you can rest assured you are in safe hands.

MORE INFORMATION

Product Installation, list of Approved Products and Material Safety Data Sheets are available on request.

**CALL CTA ON 1300 282 282
TO ARRANGE A MEETING WITH A SALES CONSULTANT**

VICTORIA 1300 282 282 NEW SOUTH WALES 1300 282 679 QUEENSLAND 1300 282 753 WA 1300 282 282

CTA
WWW.CTAGROUP.COM.AU