



SafeLine[®] Step



SafeLine[®] Step is a hybrid alternative that combines the best features of the ProStep[®] and PosiTread[®] ranges. With the durable, P5 safety of the ProStep[®] Classic, and the clean, minimal aesthetic of the PosiTread range.

Available as both an angle and a tread, the SafeLine[®] Step uses the SafeLine[®] range of strip insert safety tapes, which are manufactured from a unique combination of aluminium oxide and a thick plastic carrier to provide a flexible yet durable anti-slip solution.

Suitable for both internal and external use, SafeLine[®] Step provides a cost effective safety stair nosing that doesn't compromise on aesthetics.

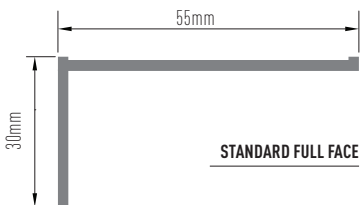

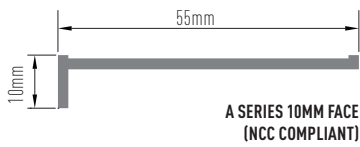
Supplied cut to length with the SafeLine[®] Tape applied, DIY installation is easy to achieve with a suitable adhesive.

KEY FEATURES

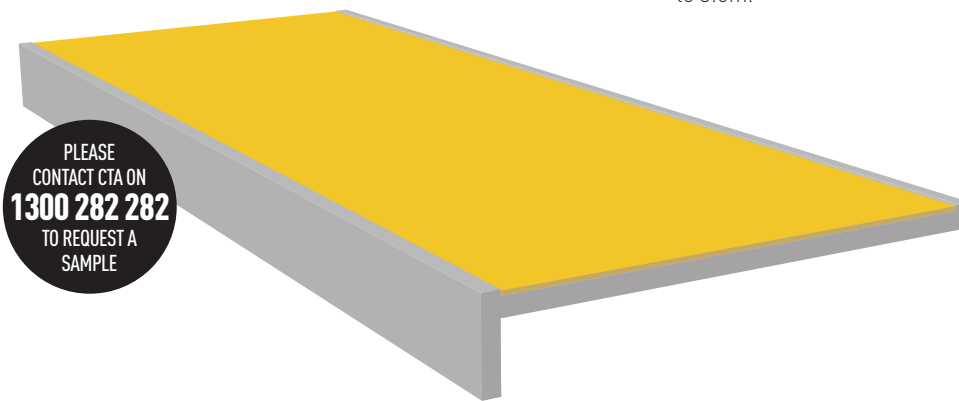
- Easy to install with no fuss - ideal for DIY applications
- Provide an P5 safety rating, the highest in the industry
- Conforms to all aspects of the relevant safety and public access standards
- Supplied to length up to 3.6m
- Available in 6 colours including hazard, and luminescent
- Meet NCC requirements

SAFELINE® STEP PROFILE

Available in 10mm face *A Series*, and SafeLine tread (both NCC compliant) and 30mm full face *Standard*.

**DIMENSIONS**

Angle with 10mm or 30mm face edge and 55mm wide. 50mm wide SafeLine safety tread inserts. Supplied to length up to 3.6m.

**PRODUCT OPTIONS**

MODEL	SLIP RATING	INSERT	PRODUCT CODE
SafeLine Tread	P5	SafeLine	UMD080-XXX
10mm SafeLine Angle	P5	SafeLine	UMD075-XXX
30mm SafeLine Angle	P5	SafeLine	UMD085-XXX

Where XXX = Insert colour (see right). Also available as a Black extrusion.

MATERIAL

Manufactured from anodised aluminium extrusions and SafeLine® inserts – a unique combination of aluminium oxide and a thick plastic carrier. Also available in Anodised black extrusion.

APPLICATIONS

SafeLine® Step stair nosing is particularly suitable for light duty pedestrian traffic in internal and external flooring surfaces prone to water or oil spillage.

INSTALLATION

Supplied to length for installation with a suitable adhesive.

COLOURS**COMPLIANCE**

All CTA products conform with the requirements of the Australian standards and are tested by NATA certified labs.

Please consult with CTA for relevant test reports:

- AS1428:2009 Design for access and mobility
- AS4586:2013 Slip resistance classifications for new pedestrian surface materials
- NCC - National Construction Codes

LUMINANCE CONTRAST

Please view the CTA Luminance Brochure for details or contact your CTA representative to discuss or request an onsite luminosity test.

WARRANTY

CTA provides a comprehensive warranty, in accordance with our published warranty statement which can be viewed on cobbletac.com.

CTA COMPLETE CARE MAINTENANCE

Asset owners have a Duty of Care responsibility to maintain access product within design performance parameters. CTA offers a fully integrated maintenance program which includes regular scheduled maintenance and replacement of worn components where necessary. Please contact your CTA representative for information on our "Complete Care Program."

CTA INSTALLERS

CTA's accredited installers are available to do the installation work for you – with short turnaround times and guaranteed workmanship. Our installation team is the largest and most experienced in the nation, so you can rest assured you are in safe hands.

MORE INFORMATION

Product Installation, list of Approved Products and Material Safety Data Sheets are available on request.

CALL CTA ON 1300 282 282
TO ARRANGE A MEETING WITH A SALES CONSULTANT

VICTORIA 1300 282 282 NEW SOUTH WALES 1300 282 679 QUEENSLAND 1300 282 753 WA 1300 282 282

CTA
WWW.CTAGROUP.COM.AU